

# KuDE - ODBC

1. Ejecutar el programa KudeODBC




2. Click en Iniciar API

A screenshot of the 'KUDE ODBC API v26.54' application window. The window has a title bar with standard Windows window controls. Below the title bar, there are three buttons: 'Iniciar API' (highlighted with a purple box), 'Detener API', and 'Probar Conexión'. Below the buttons, there are two tabs: 'Configuración' (selected) and 'Log'. The 'Configuración' tab contains several configuration fields:

- Connection: DSN=DISCOVERY;Uid=usuario;Pwd=password;
- Puerto: 5000
- Tablas (whitelist):
- PK Map (JSON): {"CLIENTES": [{"cli\_cod":}]
- Default Limit: 100
- Max Limit: 1000
- Timeout (s): 30
- CORS:  Habilitado
- Allowed Origins: http://localhost:5000
- Auth Mode: apiKey
- API Key: \*\*\*\*\*
- Debug:  Log Debug

At the bottom left of the window, the status 'Listo' is displayed.

3. Listo

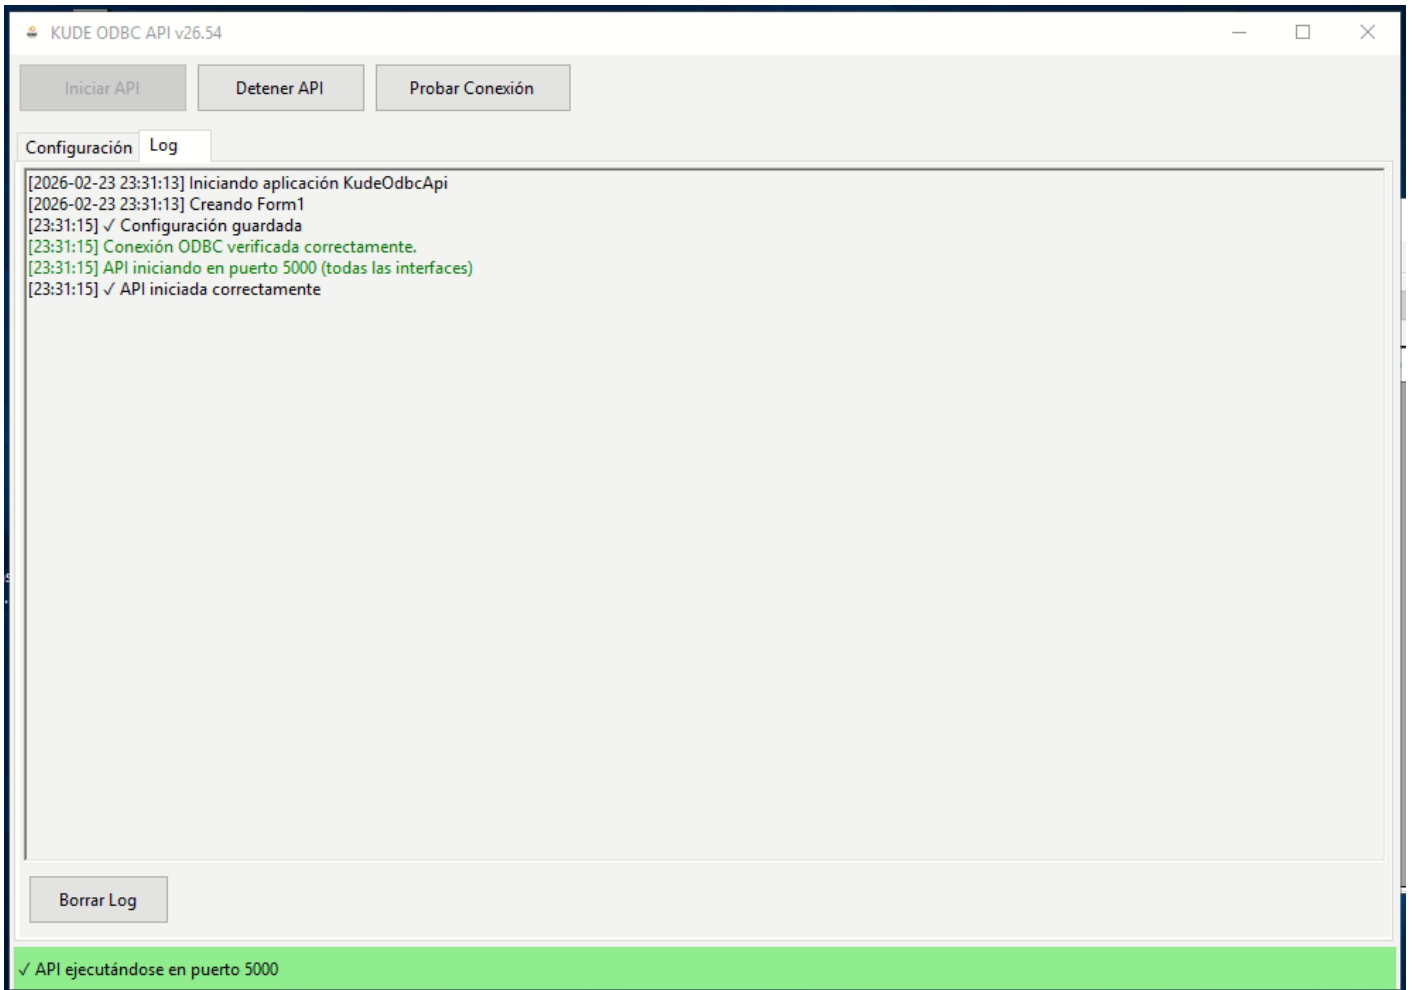

Revision #2

Created 24 February 2026 03:02:11 by Juan Bogado

Updated 24 February 2026 03:25:20 by Juan Bogado